


A1.5KSTU-SR 1.5KW UHF Television Transmitter

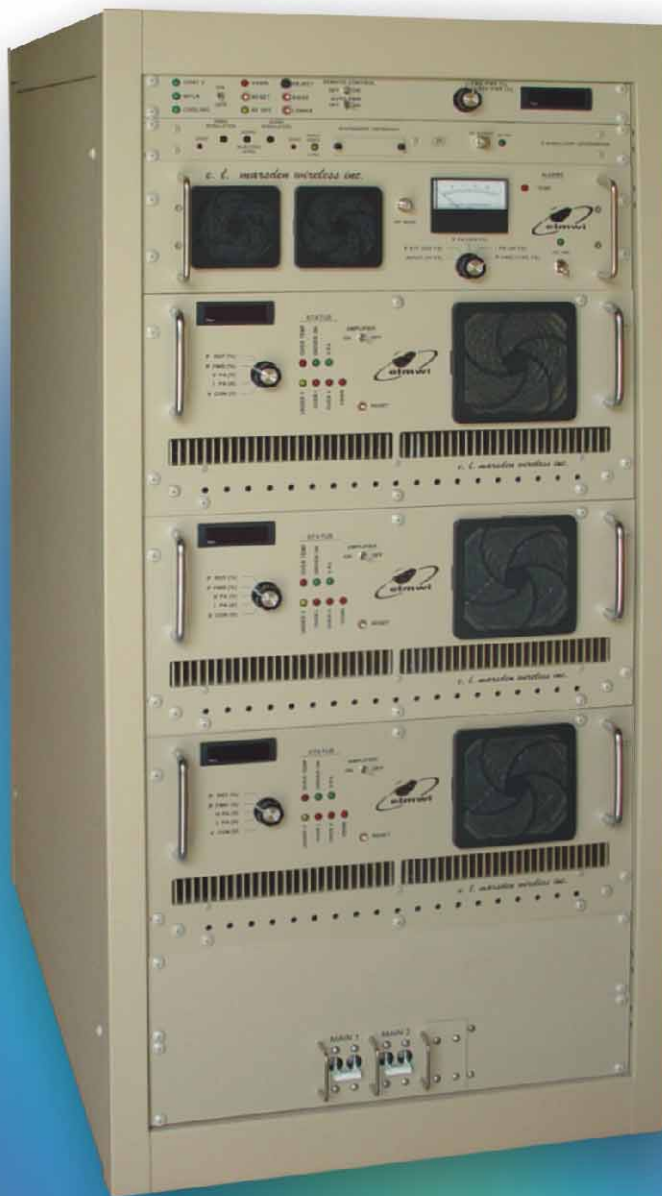

15731 Nike Drive, Terrell, TX 75160, USA
Phone: 972-524-6412 • FAX: 972-563-0859
www.elmwi.com

Description of the Equipment

The A1.5KSTU-SR is a 1 kilowatt UHF Television Transmitter designed for NTSC, PAL, SECAM or Digital Formats.

The audio and video signals are fed to the exciter assembly, which consists of two stages. A modulator/upconverter creates on-channel visual and aural carriers at 0 dBm. This signal is then amplified by the 25 Watt driver amplifier and fed to multiple 700 Watt power amplifiers (PA) which are combined to provide the appropriate transmitter output power. The combined output is fed to a notch/bandpass filter and a directional coupler. These components supply the RF signal to the antenna.

The A1.5KSTU-SR has many control and protection features seldom found in comparably priced equipment:

- The driver and all PA amplifiers have circulator isolated outputs for enhanced reliability and performance.
- Active components are located on printed circuit boards for fast, easy field service.
- All of the metering and control circuitry is built with precision components.
- Light emitting diodes (LEDs) give a quick, visual indication of the condition of the transmitter.
- Digital panel meters give accurate readings of important voltages, currents, and powers associated with the driver and PA.
- Robust power components insure that the transmitter can survive adverse conditions.
- All of the major components, such as power supplies, combiners, circulators, and fans, are easily field replaceable and are readily available from either the original manufacturer or from *e. l. marsden wireless, inc.*

Technical Specifications

Output Specifications

Overall:

Power Capability	1.8 kW Visual (peak sync) with 180 W Aural (average)
Frequency Range	Any TV channel within the 470-860 MHz band including standard offsets
Output Impedance	50 Ohms
Output Connector	7/8" EIA Flange
Carrier Stability	± 1 kHz standard and offset channels
Intercarrier Stability	± 500 Hz
Harmonics Products	-60 dB or better referred to sync peak
Non-Harmonic Spurious Products	As per appropriate FCC or CCIR Standard

Video:

Differential Gain	5%
Differential Phase	$\pm 3^\circ$
Group Delay	As per appropriate FCC or CCIR Standard
Frequency Response (Sideband)	As per appropriate FCC or CCIR Standard
In Band Intermodulation Products	-52 dB or better (using three tone test)

Audio:

Frequency Response (Main Channel)	± 0.5 dB (50Hz to 15 kHz with appropriate de-emphasis)
Pre-emphasis	As per appropriate FCC or CCIR Standard
FM Noise	-60 dB or better
AM Noise	-50 dB or better
Total Harmonic Distortion	0.5% or better
Frequency Deviation Capability	± 25 kHz for Monophonic Operation Stereo exciter available as option

Input Specifications:

Video Input Impedance / Level	75 Ohms, 1V(p-p)
Audio Input Impedance / Level	10k Ohms unbalanced, 140 mV RMS (600 Ohms balanced, -10 dBm to +10 dBm option available)
AC Line Voltage	208 / 240 VAC \pm 5%, single phase, 60 Hz/50 Hz (Specify 50 Hz or 60 Hz when ordering)

General Specifications:

Driver	25 W LDMOS Amplifier
Output Stage	Multiple 700 W LDMOS Amplifiers
Cooling	Forced Air
Max Altitude	7500 ft (higher altitude operation as option)
Ambient Temperature Range	-30° C to +50° C
Ambient Humidity Range	0 - 95% relative humidity without condensation
Dimensions (W x H x D): Cabinet	22" x 47.25" x 30.75"
Output Filter/Coupler	Internal or External as required
Weight	~380 lbs.
Power Consumption (Typical)	~4.5 kVA (black picture, 1.5 kW peak visual, 150 W aural)
Heat Load @ Full Output (Typical)	~11,700 BTU/Hr @ 1.5kW output (black picture)
Air Conditioning Requirements	Based on local environment; consult factory
Built in remote Interface Provided	
Built in automatic RF output control	

Additional Options:

- Automatic FSK Station Identifier
- AC Surge Protector
- BTSC Stereo Generator
- Remote Control
- Dual Exciter Assembly
- Input Video Automatic Gain Control
- Audio Processor
- Spare Parts Kit
- Video Proc Amp
- Tall Rack (W x H x D, 22 x 69.5 x 32)

**For more information, call 972-524-6412
and ask for Brendan or Gale.**